




**foster  
transformer  
company**



*The Standard of Quality Since 1937*

<http://www.foster-transformer.com>


3820 colerain avenue ♦ cincinnati, oh 45223-2586 ♦ phone:(513)681-2420 ♦ fax:(513)681-2424 ♦ toll free:(800)963-9799

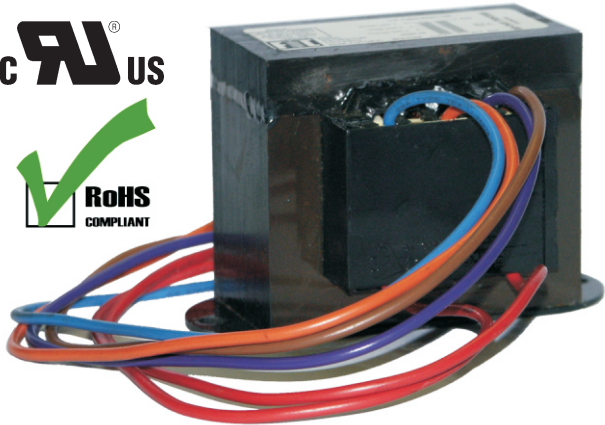

## SURVIVOR CT TRANSFORMERS:

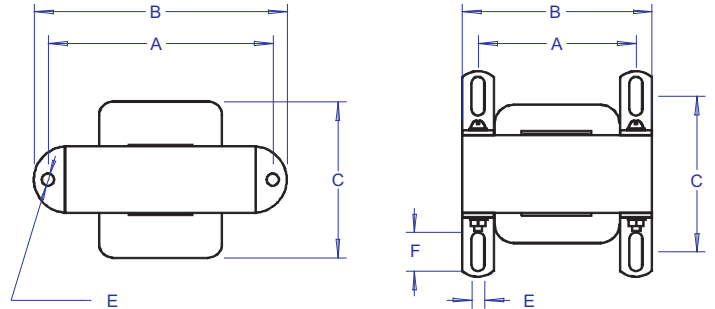

30 VA -75 VA  
100 VA, 60 Hz



100 VA

- ✓ UL / C-UL Recognized. UL File: E17029.
- ✓ UL Recognized Class 130 (B) Insulation System.
- ✓ Breakthrough Short Circuit & Overload Protection.
- ✓ No External Fusing Required.
- ✓ Can Withstand a Direct Short Circuit in Excess of 15 Days!
- ✓ Lowers Warranty Costs, Improves Customer Satisfaction.
- ✓ CE Compliant Designs Available.

Designed for use in HVAC, Appliance, Vending, Battery Charger and other applications requiring a Class 2 Control Transformer.

All Designs are Inherently Limited as defined by UL 5085-3 (UL 1585).

Model:	Input:	Frequency:	Output:	Capacity:	A	B	C	D	E	F
15299	115 V	50/60 Hz	24 VCT	30 VA	2 13/16	3 1/4	2 3/16	2	3/16	
16134	115 V	60 Hz	24 VCT	75 VA	3 9/16	4	2 1/2	2 9/16	3/16	
16134-50	115 V	50/60 Hz	24 VCT	75 VA	3 9/16	4	2 3/4	2 9/16	3/16	
16133	115/(200)/230 V	60 Hz	24 VCT	75 VA	3 9/16	4	2 1/2	2 9/16	3/16	
16133-50	115/(200)/230 V	50/60 Hz	24 VCT	75 VA	3 9/16	4	2 3/4	2 9/16	3/16	
16131	200/230 V	60 Hz	24 VCT	75 VA	3 9/16	4	2 1/2	2 9/16	3/16	
16135	200/230 V	50/60 Hz	24 VCT	75 VA	3 9/16	4	2 3/4	2 9/16	3/16	
16132	460 V	60 Hz	24 VCT	75 VA	3 9/16	4	2 1/2	2 9/16	3/16	
16132-50	460 V	50/60 Hz	24 VCT	75 VA	3 9/16	4	2 3/4	2 9/16	3/16	
16232	115 V	60 Hz	24 VCT	100 VA	3 9/16	4	2 3/4	2 9/16	3/16	
16213	115 V	50/60 Hz	24 VCT	100 VA	2 1/2	3	2 3/4	2 13/16	13/64	5/8
16233	115/(200)/230 V	60 Hz	24 VCT	100 VA	3 9/16	4	2 3/4	2 9/16	3/16	
16214	115/(200)/230 V	50/60 Hz	24 VCT	100 VA	2 1/2	3	2 3/4	2 13/16	13/64	5/8
16234	200/230 V	60 Hz	24 VCT	100 VA	3 9/16	4	2 3/4	2 9/16	3/16	
16215	200/230 V	50/60 Hz	24 VCT	100 VA	2 1/2	3	2 3/4	2 13/16	13/64	5/8

1. All part numbers are UL Recognized, C-UL Component Certified to UL 5085-3 (UL1585) / C.S.A. C22.2, Number 66.1.
2. 200 V tap on models 16133, 16133-50, 16233, and 16214 optional. Must be specified at order placement.
3. Special voltages, mounting, and lead out configurations are available. Consult factory for details.