


foster transformer company

The Standard of Quality Since 1937

http://www.foster-transformer.com

3820 colerain avenue • cincinnati, oh 45223-2586 • phone: (513) 681-2420 • fax: (513) 681-2424 • toll free: (800) 963-9799

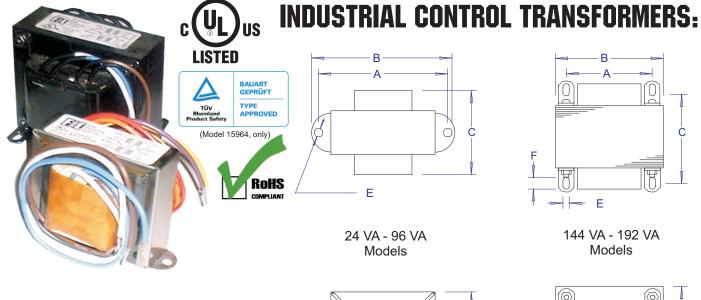

- ✓ UL / C-UL Listed. UL File: E19598.
- UL Recognized Class 130 (B) Insulation System.
- ✓ Layer wound construction for long life.
- Optional Faraday Safety Shield for Isolation / Noise Reduction.
- Can be used in Buck-Boost Configuration for Line Voltage Correction.
- Available with Flying Leads or Quick Connect Tabs.

Designed for use in Appliance, Vending, Medical, Battery Charger, and other commercial and industrial applications requiring a low voltage power transformer. Ideal for use in power supplies.

D

6

Other output voltages and terminal configurations are available. by special order.

Model:	Input:	Frequency:	Output:	Ouput:	А	В	С	D	E	F
14456	120/240 V	50/60 Hz	6/12 V	24 VA	2 13/16	3 3/16	2 1/2	2 11/16	3/16	
15960	120/240 V	50/60 Hz	12/24 V	24 VA	2 13/16	2 5/16	2 1/2	2 11/16	3/16	
14457	120/240 V	50/60 Hz	12/24 V	48 VA	3 9/16	4	2 1/2	2 9/16	3/16	
14458	120/240 V	50/60 Hz	12/24 V	96 VA	4	4 1/2	2 7/8	2 15/16	3/16	
15961	120/240 V	50/60 Hz	17 V	96 VA	4	4 1/2	2 7/8	2 15/16	3/16	
15962	120/240 V	50/60 Hz	15/30 V	96 VA	4	4 1/2	2 7/8	2 15/16	3/16	
15963	120/240 V	50/60 Hz	12/24 V	144 VA	3 1/8	3 13/16	2 1/2	3 3/16	13/64	3/8
14459	120/240 V	50/60 Hz	12/24 V	192 VA	2 3/4	3 1/2	3	4 3/16	13/64	3/8
15964	120/240 V	50/60 Hz	24 VCT	192 VA	2 3/4	3 1/2	3	4 3/16	13/64	3/8
15985	120/240 V	50/60 Hz	24 VCT	192 VA	2 3/4	3 1/2	3	4 3/16	13/64	3/8

- 1. All part numbers are UL Listed, C-UL Certified to UL 5085-1 (UL506) / C.S.A. C22.2, Number 66.1.
- 2. Part number 15964 certified by TÜV Rheinland to EN 61558-1, 61558-2-6 and EN 60335-1. Certificate Number 09971077.
- 3. Special voltages, mounting, and lead out configurations are available. Consult factory for details.