foster
transformer
company
http://www.foster-transformer.com

Look for this symbol to identify products that comply with the Buy American provisions of the American Reinvestment and Recovery Act of 2009 (ARRA), the Trade Agreements Act of 1979 (TAA), the Buy American Act of 1933 (BAA), and Federal Acquistions Regulations subpart 25.1 (FAR).

The Standard of Quality Since 1937

3820 colerain avenue ◆ cincinnati, oh 45223-2586 ◆ phone:(513)681-2420 ◆ fax:(513)681-2424 ◆ toll free:(800)963-9799

c UL US LISTED

RoHS COMPLIANT

UL LISTED CLASS 2 TRANSFORMERS:

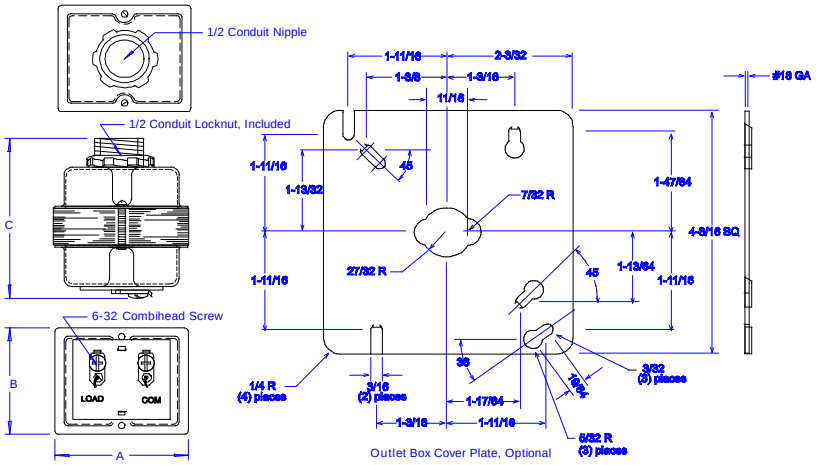

- Input Voltages: 115, 115/230 & 200/230 V, 50/60 Hz.
- Output Voltages: 12 V or 24 V.
- Power Ratings: 5 VA or 20 VA.
- Secondary Connections available with screw terminals or 18 AWG lead wires. (5 VA, lead wires, only).
- Inherently Limited Class 2 Output, No Fusing Required.
- UL Listed and C-UL Certified, UL 5085-3 / CSA 22.2 No.66.3, UL File Number: E17029.
- Class 130 Insulation Systems for long life.
- Custom configurations are available.

Designed for applications requiring a hard wired, externally mounted Class 2 power source including alarm systems, motion sensors, automated faucets and toilets, remote signaling, low voltage lighting, door openers, control systems, dispensing equipment and commercial appliances.

Operating below Class A (105 C) temperature limits, but constructed using a Class B (130 C) Insulation System these transformers are designed for years of trouble free service and can be expected to last the life of your system.

Model:	Input:	Frequency:	Output:	Capacity:	A	B	C
16380	115 V	50/60 Hz	12 V	5 VA	1 11/16	1 3/8	2 1/4
16381	115/230 V	50/60 Hz	12 V	5 VA	1 11/16	1 3/8	2 1/4
16382	200/230 V	50/60 Hz	12 V	5 VA	1 11/16	1 3/8	2 1/4
16383	115 V	50/60 Hz	24 V	5 VA	1 11/16	1 3/8	2 1/4
16384	115/230 V	50/60 Hz	24 V	5 VA	1 11/16	1 3/8	2 1/4
16385	200/230 V	50/60 Hz	24 V	5 VA	1 11/16	1 3/8	2 1/4
16386	115 V	60 Hz	12 V	20 VA	2 5/16	1 15/16	2 3/4
16387	115/230 V	50/60 Hz	12 v	20 VA	2 5/16	1 15/16	2 3/4
16388	200/230 V	50/60 Hz	12 V	20 VA	2 5/16	1 15/16	2 3/4
16389	115 V	60 Hz	24 V	20 VA	2 5/16	1 15/16	2 3/4
16390	115/230 V	50/60 Hz	24 V	20 VA	2 5/16	1 15/16	2 3/4
16391	200/230 V	50/60 Hz	26.5 V	20 VA	2 5/16	1 15/16	2 3/4